

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

REQUEST FOR FILING APPLICATION

Under Rule 53(a), (b) & (f)

(No Filing Fee or Oath/Declaration)

(Do NOT use for Provisional or PCT Applications)

Use for Design or Utility Applications

jc772 U.S. PTO



05/31/00

PATENT
APPLICATION**RULE 53(f) NO DECLARATION**Assistant Commissioner of Patents
and Trademarks
Washington, DC 20231

Atty. Dkt.

PM 258174

M#

P003

Client Ref

Date:

May 31, 2000

Sir:

1. This is a Request for filing a new Patent Application (☐ Design ☒ Utility) entitled:

2. (Complete) Title:

COMMUNICATIONS SYSTEM FOR IMPROVING TRANSMISSION RATES AND
TRANSMISSION DISTANCES OF DATA SIGNALS ACROSS COMMUNICATION
LINKS

without a filing fee or Oath/Declaration but for which is enclosed the following:

3. ☒ Abstract 1 page(s).4. 12 Pages of Specification (only spec. and claims); 5. ☐ Specification in non-English language6. 18 Numbered claim(s); and7. ☒ Drawings: 6 sheet(s) ☐ 1 set informal; 8. ☒ formal of size: ☐ A4 ☐ 11"9. **DOMESTIC/INTERNATIONAL** priority is claimed under 35 USC 119(e)/120/365(c) based on the following provisional, nonprovisional and/or PCT international application(s):

Application No.	Filing Date	Application No.	Filing Date
(1)		(2)	
(3)		(4)	
(5)		(6)	

10. **FOREIGN** priority is claimed under 35 USC 119(a)-(d)/365(b) based on filing in

Application No.	Filing Date	Application No.	Filing Date
(1)		(2)	
(3)		(4)	
(5)		(6)	

11. (No.) Certified copy (copies): ☐ attached; ☐ previously filed (date)
in U.S. Application No. / filed on 12. ☐ This is a reissue of Patent No. 13. ☐ See top first page re prior Provisional, National, International application(s) (X box only if info is there and do not complete corresponding item 14 or 15.)14. ☐ **Amend the specification** by inserting before the first line -- This is a ☐ Continuation-in-Part
☐ Divisional ☐ Continuation ☐ Substitute Application (MPEP 201.09) of:14(a) ☐ National Appln. No. / filed -- (M#)14(b) ☐ International Appln. No. PCT/ filed which designated the U.S. --15. ☐ **Amend the specification** by inserting before the first line: --This application claims the benefit of U.S. Provisional Application No. 60/ , filed --16. Extension to date: ☐ concurrently filed ☐ not needed ☐ previously filed

17. ☐ Prior application is assigned to

by Assignment recorded _____ Reel _____ Frame _____

18. ☐ Attached:

19. This application is made by the following named inventor(s)

(Double check instructions for accuracy.):

(1) Inventor	Woody	A.	CHEA
	First	Middle Initial	Family Name
Residence	Olathe	Kansas	USA
	City	State/Foreign Country	Country of Citizenship
Post Office Address	1517 West Forest, Olathe, Kansas		
(include Zip Code)	66061		

(2) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(3) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(4) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

(5) Inventor			
	First	Middle Initial	Family Name
Residence			
	City	State/Foreign Country	Country of Citizenship
Post Office Address			
(include Zip Code)			

20. NOTE: FOR ADDITIONAL INVENTORS, check box ☐
and attach sheet with same information regarding additional inventors.

Pillsbury Madison & Sutro LLP
Intellectual Property Group

1100 New York Avenue, NW.
Ninth Floor
Washington, DC 20005-3918
Tel: (202) 861-3000
Atty/Sec: ALM/nmw

By: Atty: Anthony L. Miele

Reg. No. 34393

Sig: 

Fax: (202) 822-0944
Tel: (202) 861-3568

NOTE: File in duplicate with 2 post card receipts (PAT-103) & attachments

APPLICATION UNDER UNITED STATES PATENT LAWS

Aitty. Dkt. No. PM 258174
(M#)

Invention: COMMUNICATIONS SYSTEM FOR IMPROVING TRANSMISSION RATES AND TRANSMISSION DISTANCES OF DATA SIGNALS ACROSS COMMUNICATION LINKS

Inventor (s): Woody A. CHEA

Pillsbury Madison & Sutro LLP
Intellectual Property Group
1100 New York Avenue, NW
Ninth Floor
Washington, DC 20005-3918
Attorneys
Telephone: (202) 861-3000

This is a:

- ☐ Provisional Application
- ☒ Regular Utility Application
- ☐ Continuing Application
- ☐ PCT National Phase Application
- ☐ Design Application
- ☐ Reissue Application
- ☐ Plant Application
- ☐ Substitute Specification
Sub. Spec. Filed _____
in App. No. _____ / _____
- ☐ Marked up Specification re
Sub. Spec. filed _____
In App. No _____ / _____

SPECIFICATION

**Communications System for
Improving Transmission Rates and Transmission Distances
of Data Signals Across Communications Links**

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention generally relates to the field of communications. More particularly, the present invention relates to a communications system that improves transmission rates and transmission distances of data signals across communications links.

2. Description of Related Art

Advances in computer capabilities as well as the unprecedented growth of Internet-related transactions have placed great demands on conventional communication infrastructures to convey data to subscribers at higher transmission rates with increased reliability and levels of service. Although conventional infrastructures communicate at higher transmission rates, such as DS-3 (e.g., 45 Mbps) and OC-3 (e.g., 155 Mbps), between networked hubs, they are generally limited in their ability to accommodate such ample bandwidths between the hubs and subscribers. Such limitations arise from the infrastructures' inability to compensate for degradations encountered on conventional transmission media spanning distances of up to 18,000 ft. between the hubs and subscribers.

Consider, for example, how common carriers provide connectivity to subscribers. Typically, carrier hubs or central offices connect to subscribers via subscriber loop circuits. Subscriber loop circuits generally comprise 2-wire transmission paths (i.e., unshielded twister pairs--UTP), which support direct current signals, low frequency ($< \sim 200$ Hz) analog signals, and voice band signals (~ 200 Hz - ~ 3.4 KHz). These frequencies limit the transmission rate of

digitally-encoded signals on the 2-wire transmission paths. Further, the longer the distances traversed by the signals on the 2-wire transmission paths, the more severe the degradation of the signals; thus, this limits the transmission rates.

To increase the transmission rates on the 2-wire transmission paths, asymmetric digital subscriber lines (ADSLs) have been developed. ADSLs combine channelization (e.g., discrete multi-tone DMT), coding (e.g., constellation/trellis encoding), and framing (e.g., super-framing) techniques to achieve upstream digital rates between 64-640 Kbps and download digital rates between 500 Kbps - 7 Mbps. The ability to attain these transmission rates, however, is dependent on transmission distance. ADSLs are also sensitive to line-quality and line configurations. As a result, the higher transmission rates are available only to subscribers with "clean lines," which are within specific distances (e.g., 8,000 - 10,000 ft.) from the central office. Other approaches to increase the transmission rates on the 2-wire transmission paths include line-conditioning, which increases the line-quality of a local loop. While such conditioning provides moderate improvement in transmission rates, it is line and transmission distance dependent. Accordingly, there is a need in the art for a communications system that improves transmission rates and transmission distances of data signals across communications links.

SUMMARY OF THE INVENTION

In one embodiment of the present invention, a communications system includes a transmitter device, a receiver system, and a communications link. The transmitter device transmits a data signal. The receiver system receives and regenerates the data signal. The communications link couples the transmitter device and the receiver system. During transmission across the communications link, the data signal is susceptible to distortions of phase and

amplitude. The receiver system includes a receiver device and a processor. The receiver device receives the potentially distorted data signal from the communications link. The processor is electrically coupled to the receiver device to receive the distorted data signal. The processor regenerates the data signal to compensate for the effects of the communications link on the data signal. Then, the processor outputs the regenerated data signal.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, like reference numerals represent similar parts of the present invention throughout the several views and wherein:

FIG. 1 is a functional block diagram depicting a communications system in accordance with an exemplary embodiment of the present invention;

FIG. 2 is a functional block diagram depicting a processor in accordance with an exemplary embodiment of the present invention;

FIG. 3 is a function block diagram depicting a driver device in accordance with an exemplary embodiment of the present invention;

FIG. 4 is a function block diagram depicting a receiver device in accordance with an exemplary embodiment of the present invention;

FIG. 5 is a schematic diagram depicting an embodiment of a circuit of FIG. 4; and

FIG. 6 is a schematic diagram depicting an embodiment of a circuit of FIG. 4.

DETAILED DESCRIPTION

FIG. 1 illustrates exemplary communications system 50, which includes a hub communication transceiver 55, a peripheral communication transceiver 65, and a communications link 60. Hub communication transceiver 55 and peripheral communication transceiver 65 receive, regenerate, and transmit data signals. Communications link 60 couples hub communication transceiver 55 and peripheral communication transceiver 65, and comprises a conventional communications media, such as unshielded twisted pair (UTP) cables, coaxial cables, or fiber-optic cables. Communications link 60 spans distances at least as long as 18,000 ft. This embodiment of communications system 50 allows for high transmission rates, such as 44.736 Mbps (i.e., DS-3), and 155 Mbps (i.e., OC-3).

Hub communication transceiver 55 comprises a transmitter device (i.e., driver device) 56, a receiver device 58, and a processor 100. Hub communication transceiver 55 is coupled to a transmission facility (i.e., central office/node (CO)) 54, which, for example, transmits a data signal destined for a subscriber 64. The data signal, such as a pulse code modulated (PCM) signal, carries digitally-encoded data. It should be noted that the data signal is susceptible to distortions during transmission across the communications media. Such distortions may affect certain attributes of the data signal, such as phase and amplitude. A receiver device (not shown) receives the data signal from CO 54. Processor 100 is electrically coupled to the receiver device, driver device 56, and receiver device 58. In this configuration, processor 100 receives the potentially distorted data signal from the receiver device, regenerates the data signal, and outputs the regenerated data signal. Simply put, processor 100 is configured to receive a distorted data signal, to decompose the distorted data signal into component signals, to process the component signals to compensate for the effects of the communications media on the data signal, and to combine the component signals to regenerate the data signal. Then, driver device 56 transmits

the regenerated data signal to peripheral communication transceiver 65 across communications link 60. In the specific embodiment illustrated herein, processor 100 comprises a communications processor as disclosed in the commonly-assigned copending application filed on even date herewith in the name of Woody A. Chea, entitled "Dual Stage Communication Processor," the content of which is hereby expressly incorporated herein in its entirety.

Similarly, peripheral communication transceiver 65 comprises a transmitter device (i.e., driver device) 56, a receiver device 58, and a processor 100. Peripheral communication transceiver 65 is coupled to a transmission facility (i.e., subscriber) 64, which, for example, receives the data signal. Receiver device 58 receives the data signal from hub communication transceiver 55. Processor 100 is electrically coupled to receiver device 58, transmitter device (i.e., driver device) (not shown), and driver device 56. In this configuration, processor 100 receives the potentially distorted data signal from receiver device 58, regenerates the data signal, and outputs the regenerated data signal. As stated above, processor 100 is configured to receive a distorted data signal, to decompose the distorted data signal into component signals, to process the component signals to compensate for the effects of the communications media on the data signal, and to combine the component signals to regenerate the data signal. Then, the driver device transmits the regenerated data signal to subscriber 64.

At the peripheral end of communications link 60, subscriber 64 may transmit a data signal destined for CO 54. That is, a receiver device (not shown) of peripheral communication transceiver 65 receives the data signal from subscriber 64. Processor 100 is electrically coupled to the receiver device, and receives the potentially distorted data signal from the receiver device, regenerates the data signal, and outputs the regenerated data signal. Then, driver device 56 transmits the regenerated data signal to hub communication transceiver 55 across

communications link 60. Receiver device 58 of hub communication transceiver 55 receives the data signal from peripheral communication transceiver 65. Processor 100 of hub communication transceiver 55 is electrically coupled to a transmitter device (i.e., driver device) (not shown), and receives the potentially distorted data signal from receiver device 58, regenerates the data signal, and outputs the regenerated data signal. Then, the driver device transmits the regenerated data signal to CO 54.

In short, communications system 50 allows transporting data signals at higher transmission rates across longer transmission distances of conventional communications media than is currently possible.

FIG. 2 illustrates an embodiment of processor 100. Processor 100 comprises a coupler 102, a coupler 104, a decoder 110, a power supply 114, a coupler 126, an encoder 120, a power supply 122, and a coupler 124. Coupler 102, which includes impedance matching capabilities, receives the potentially distorted data signal RIN. Coupler 102 includes a 75 ohms resistor that matches the impedance of communications link 60, for example. The coupled data signal RIN is supplied to coupler 104, which comprises a high-frequency coupler to filter high-frequency components of data signal RIN. The output of coupler 104 is supplied to decoder 110, which generates potentially distortionless component digital data signals and a clock based on the filtered data signal R'IN from coupler 104. Power supply 114 powers decoder 110, and implements noise dampening circuitry to reduce the effects of noise. The component digital data signals and clock of decoder 110 are supplied to encoder 120 via coupler 112. Encoder 120 generates analog signals based on the component digital data signals from decoder 110. Power supply 122 powers encoder 120, and implements noise dampening circuitry to reduce the effects of noise. Coupler 124 selectively outputs regenerated data signal ROUT from at least one of the

analog signals. It should be noted that regenerated data signal ROUT is cleaner than data signal RIN. As a result, regenerated data signal ROUT may be transmitted across communications link 60 over longer distances than data signal RIN.

FIG. 3 illustrates an embodiment of driver device 56. Driver device 56 comprises a coupler 310, a pair of pre-drivers 315, a pair of driver sets 320, and a coupler 325. Coupler 310 comprises a transformer having a center pin grounded. Coupler 310 receives the regenerated data signal ROUT and outputs signals similar to ROUT to each of pre-drivers 315, except that the outputted signals are 180 degrees out of phase relative to each other. Pre-drivers 315, configured as wide band amplifiers, amplify the outputted signals of coupler 310. The wide band amplifiers may be configured as current or voltage amplifiers.

Pre-drivers 315 are coupled to driver sets 320. Driver set 320 comprises a plurality of drivers that are configured in parallel. The drivers of driver set 320 are amplifiers, such as 100 mA, 18-20 V peak-to-peak amplifiers. Driver sets 320 improve signal gain and reduce susceptibility of the drivers of driver sets 320 to saturate. Driver sets are 320 coupled to coupler 325. Coupler 325 comprises a transformer having an ungrounded center pin, and is configured to combine the signals from driver sets 320 to provide a data signal capable of being transmitted across communications link 60.

FIG. 4 illustrates an embodiment of receiver device 58. Receiver 58 comprises a coupler block 400, impedance matching and pre-amplification block 405, pre-amplification and multiplier block 410, and pre-amplification block 415. Coupler block 400 receives the transmitted data signal. Coupler block 400 comprises a transformer having a grounded center pin. Impedance matching and pre-amplification block 405, which is schematically illustrated in FIG. 5, is coupled to coupler block 400, and comprises a resistor to match the impedance of

communications link 60, and a pre-amplification circuit with high frequency adjustments. Pre-amplification and multiplier block 410, which is schematically illustrated in FIG. 6, is coupled to impedance matching and pre-amplification block 405, and comprises a common mode rejection multiplier configuration. Also, pre-amplification and multiplier block 410 is coupled to pre-amplification block 415 via a low pass filter. Pre-amplification block 415, which is schematically illustrated in FIG. 6, outputs the data signal to processor 100.

In sum, communications system 50 allows transporting data signals at higher transmission rates across longer transmission distances of conventional communications media than is currently possible. Although this invention has been shown in relation to a particular embodiment, it should not be considered so limited. Rather, the invention is limited only by the scope of the appended claims and their equivalents.

What is Claimed is:

1. A system comprising:

a transmitter device adapted to transmit a data signal;

5 a receiver system adapted to receive and regenerate the data signal; and

a communications link coupled to the transmitter device and the receiver system, the data signal being susceptible to distortions of phase and amplitude during transmission across the communications link,

10 wherein the receiver system includes a receiver device adapted to receive the potentially distorted data signal from the communications link and a processor electrically coupled to the receiver device and adapted to receive the distorted data signal from the receiver device, regenerate the data signal to compensate for the effects of the communications link on the data signal, and output the regenerated data signal.

15 2. The system of claim 1, wherein the receiver system further comprises a driver device electrically coupled to the processor and adapted to transmit a data signal to the communications link.

3. The system of claim 1, further comprising,

20 a transceiver system adapted to receive, regenerate and transmit a data signal, the transceiver system includes the transmitter device, a receiver device adapted to receive the potentially distorted data signal from the communications link, and a processor electrically coupled to the transmitter device and the receiver device and adapted to receive the distorted data

signal from the receiver device, regenerate the data signal to compensate for the effects of the communications link on the data signal, and output the regenerated data signal.

4. The system of claim 1, wherein the transmitter device includes a driver device.

5

5. The system of claim 1, wherein the receiver system further comprises a driver device electrically coupled to the processor and adapted to transmit the regenerated data signal to a subscriber.

10

6. The system of claim 1, wherein the transmitter device is a subscriber transmitter device.

10

7. The system of claim 3, wherein the transceiver system further comprises a driver device electrically coupled to the processor and adapted to transmit the regenerated data signal to a central node.

15

8. The system of claim 1, further comprising,

a transceiver system adapted to receive, regenerate and transmit the data signal, the transceiver system includes the transmitter device, a receiver device adapted to receive a potentially distorted data signal from a central node, and a processor electrically coupled to the transmitter device and the receiver device and adapted to receive the distorted data signal from the receiver device, regenerate the data signal to compensate for the effects of transmission from the central node, and output the regenerated data signal.

20

9. The system of claim 1, wherein the data signal comprises digitally encoded data signal.

10. The system of claim 1, wherein the communications link comprises at least one of unshielded twisted pair cable, coaxial cable, and fiber optic cable.

5

11. The system of claim 1, wherein the data signal is transmitted across the communications link at transmission rates at least as high as 44.736 Mbps.

12. The system of claim 4, wherein the communications link is at least 18,000 feet long.

13. A system comprising:

a driver device adapted to transmit a data signal, the data signal having transmission rates at least as high as 44.736 Mbps;

a receiver device adapted to receive the data signal; and

a communications link coupled to the driver device and the receiver device, the data signal being susceptible to distortions of phase and amplitude during transmission across the communications link, the communications link is at least 18,000 feet long.

14. The system of claim 13, wherein the communications link comprises at least one of unshielded twisted pair cable, coaxial cable, and fiber optic cable.

15. The system of claim 13, further comprising,

a receiver system adapted to receive, regenerate and transmit the data signal, the receiver system includes the receiver device adapted to receive the potentially distorted data signal from the communications link and a processor electrically coupled to the receiver device and adapted to receive the distorted data signal from the receiver device, regenerate the data signal to compensate for the effects of the communications link on the data signal, and output the regenerated data signal.

16. The system of claim 15, wherein the receiver system further comprises a driver device electrically coupled to the processor and adapted to transmit the regenerated data signal to a subscriber.

17. The system of claim 15, wherein the receiver system further comprises a driver device electrically coupled to the processor and adapted to transmit the regenerated data signal to a central node.

18. The system of claim 13, wherein the data signal comprises digitally encoded data signal.

ABSTRACT

A communications system includes a transmitter device, a receiver system, and a communications link. The communications link couples the transmitter device and the receiver system. The receiver system includes a receiver device and a processor. The transmitter device transmits a data signal. The receiver device receives the data signal from the communications link. The processor is electrically coupled to the receiver device to receive the data signal. The processor regenerates the data signal to compensate for the effects of the communications link on the data signal. Then, the processor outputs the regenerated data signal.


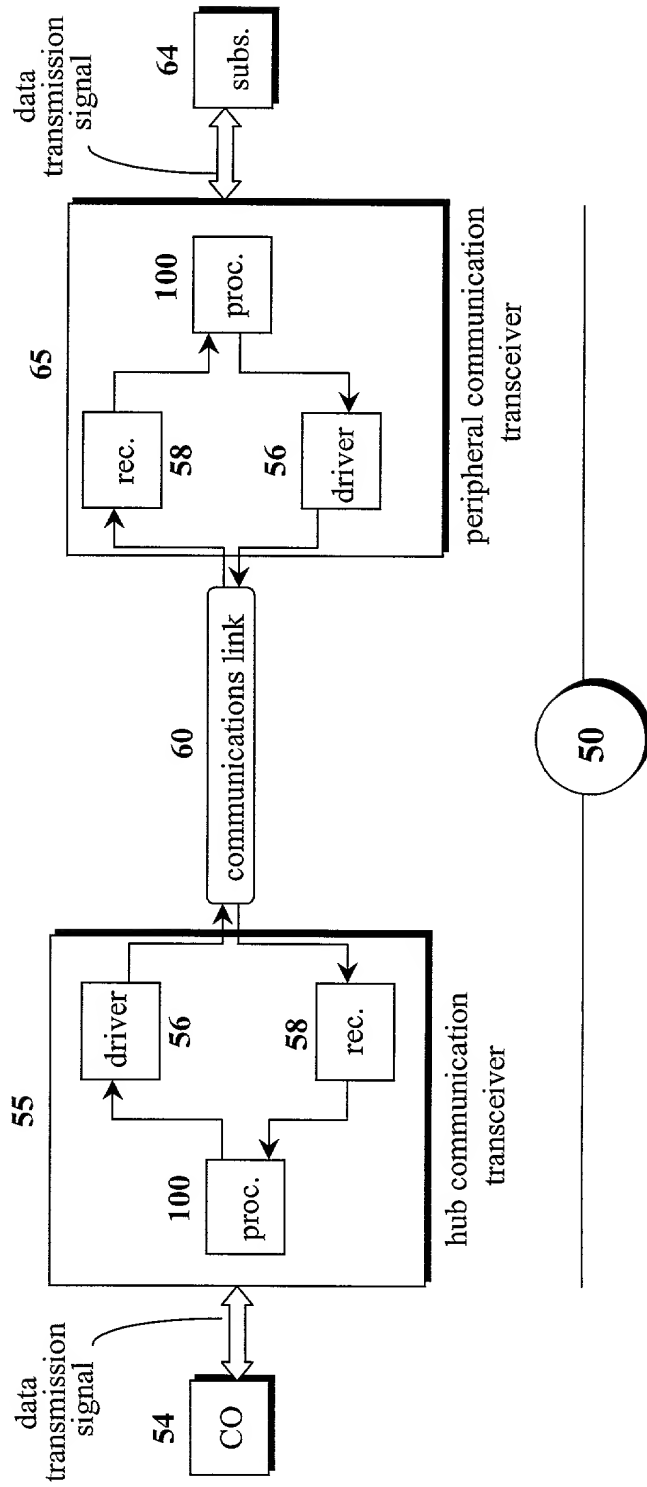


FIG. 1

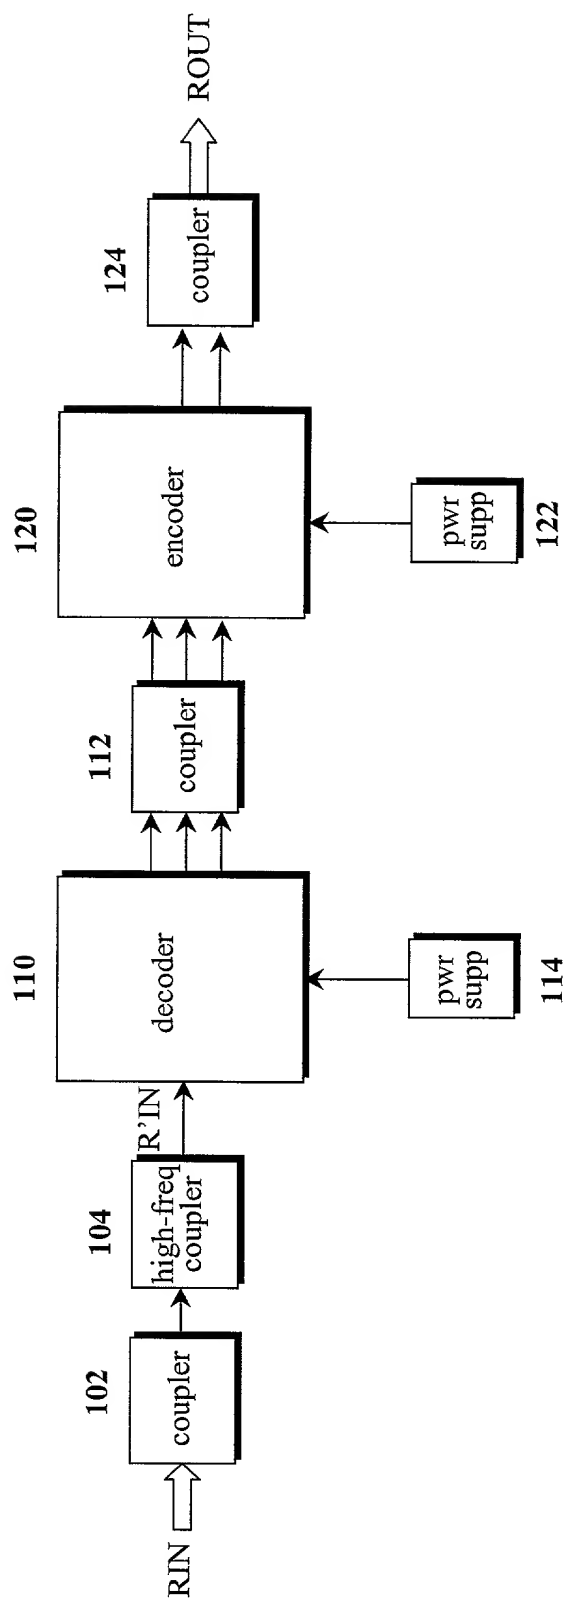

100

FIG. 2


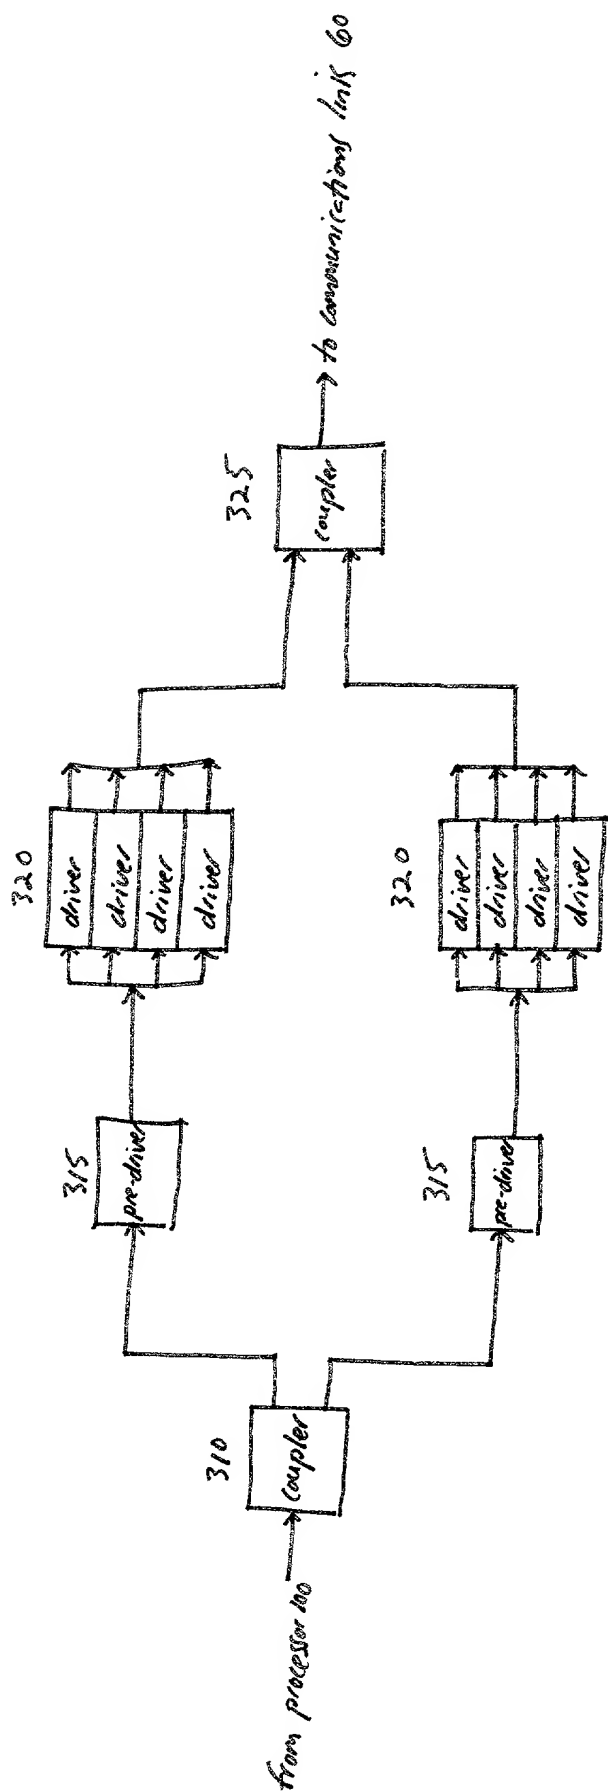


FIG. 3

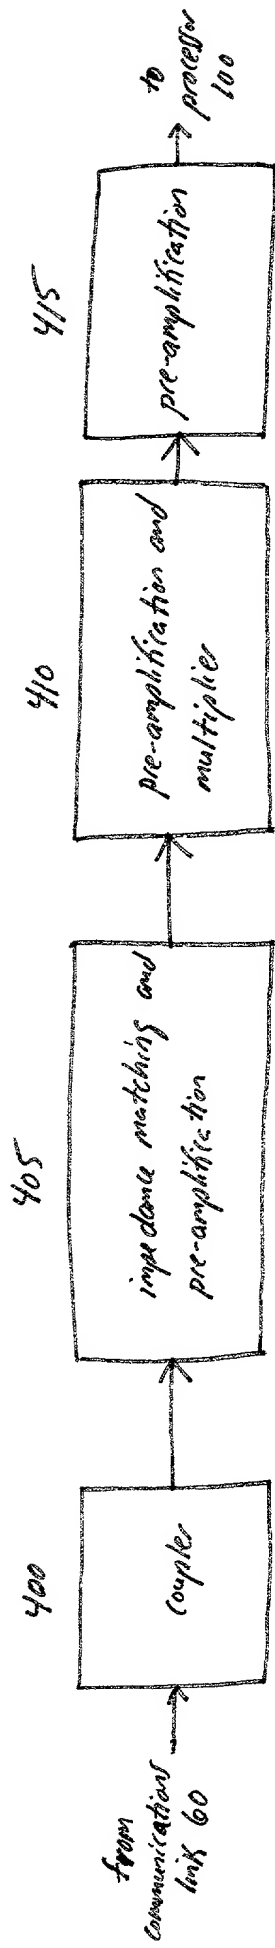

58

FIG. 4

405

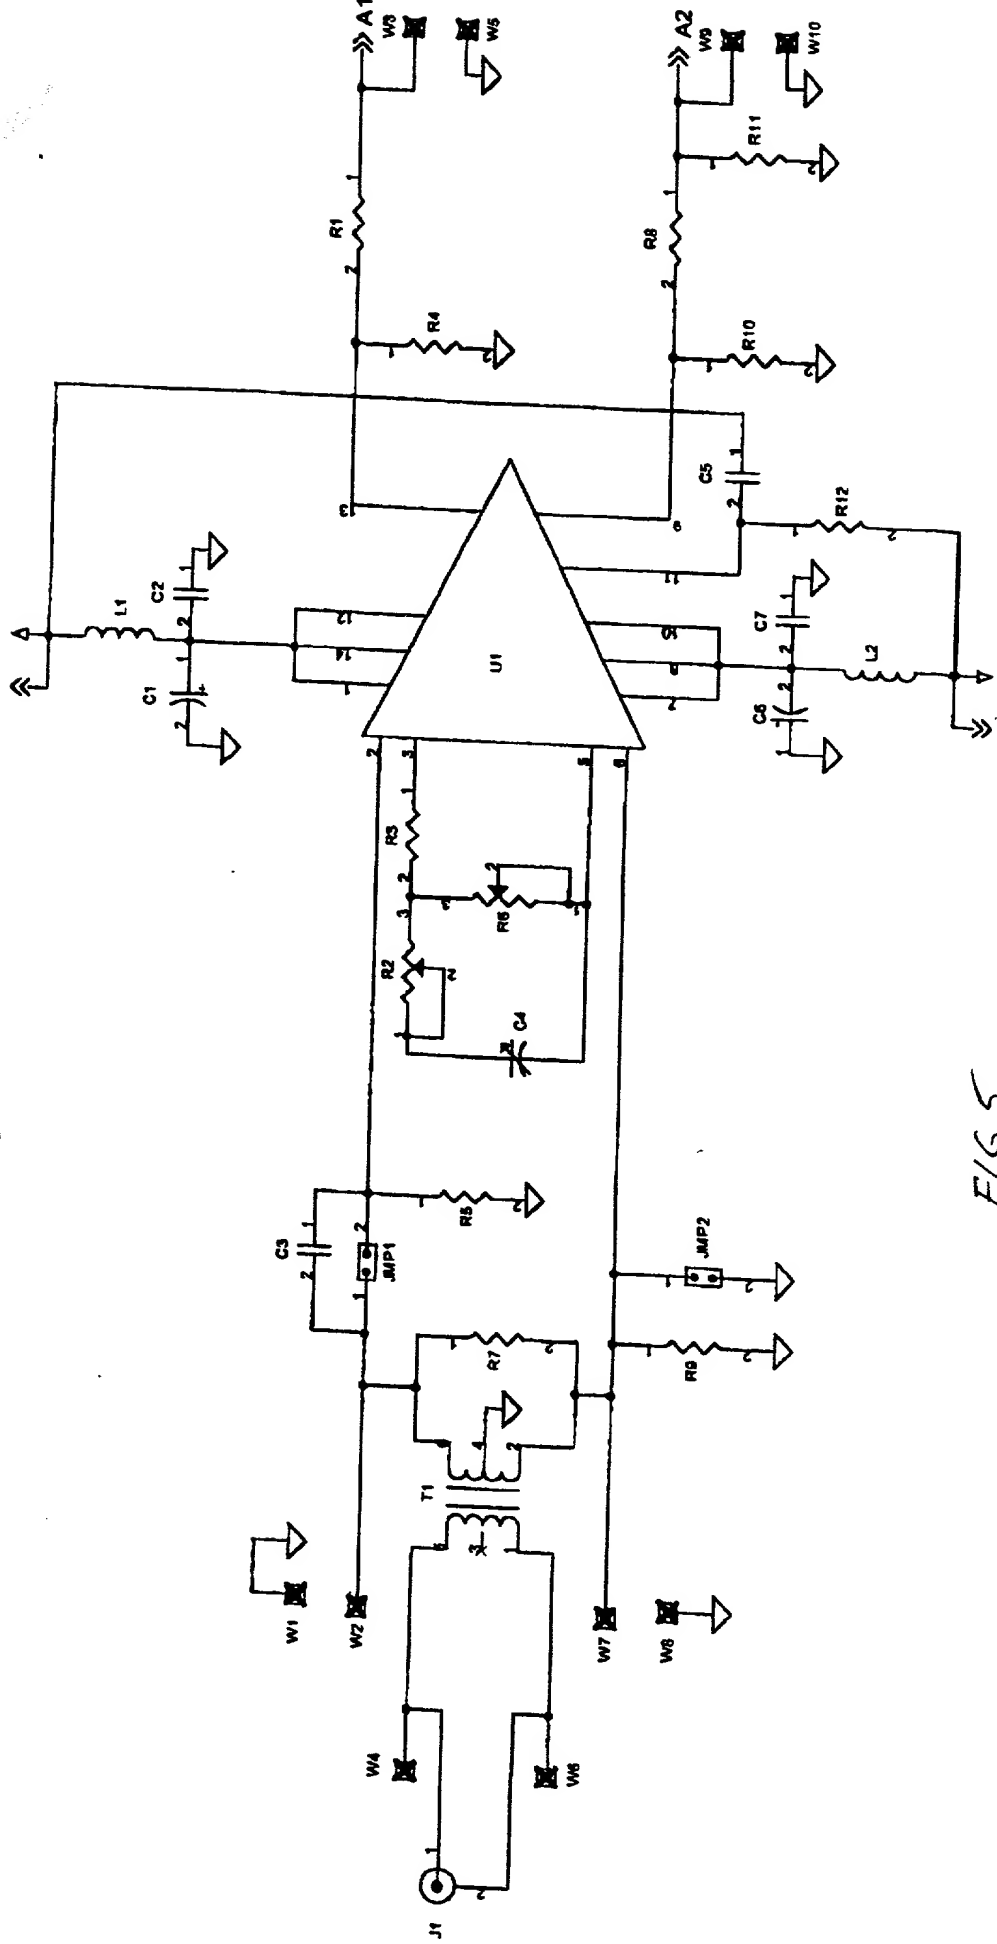


FIG. 5

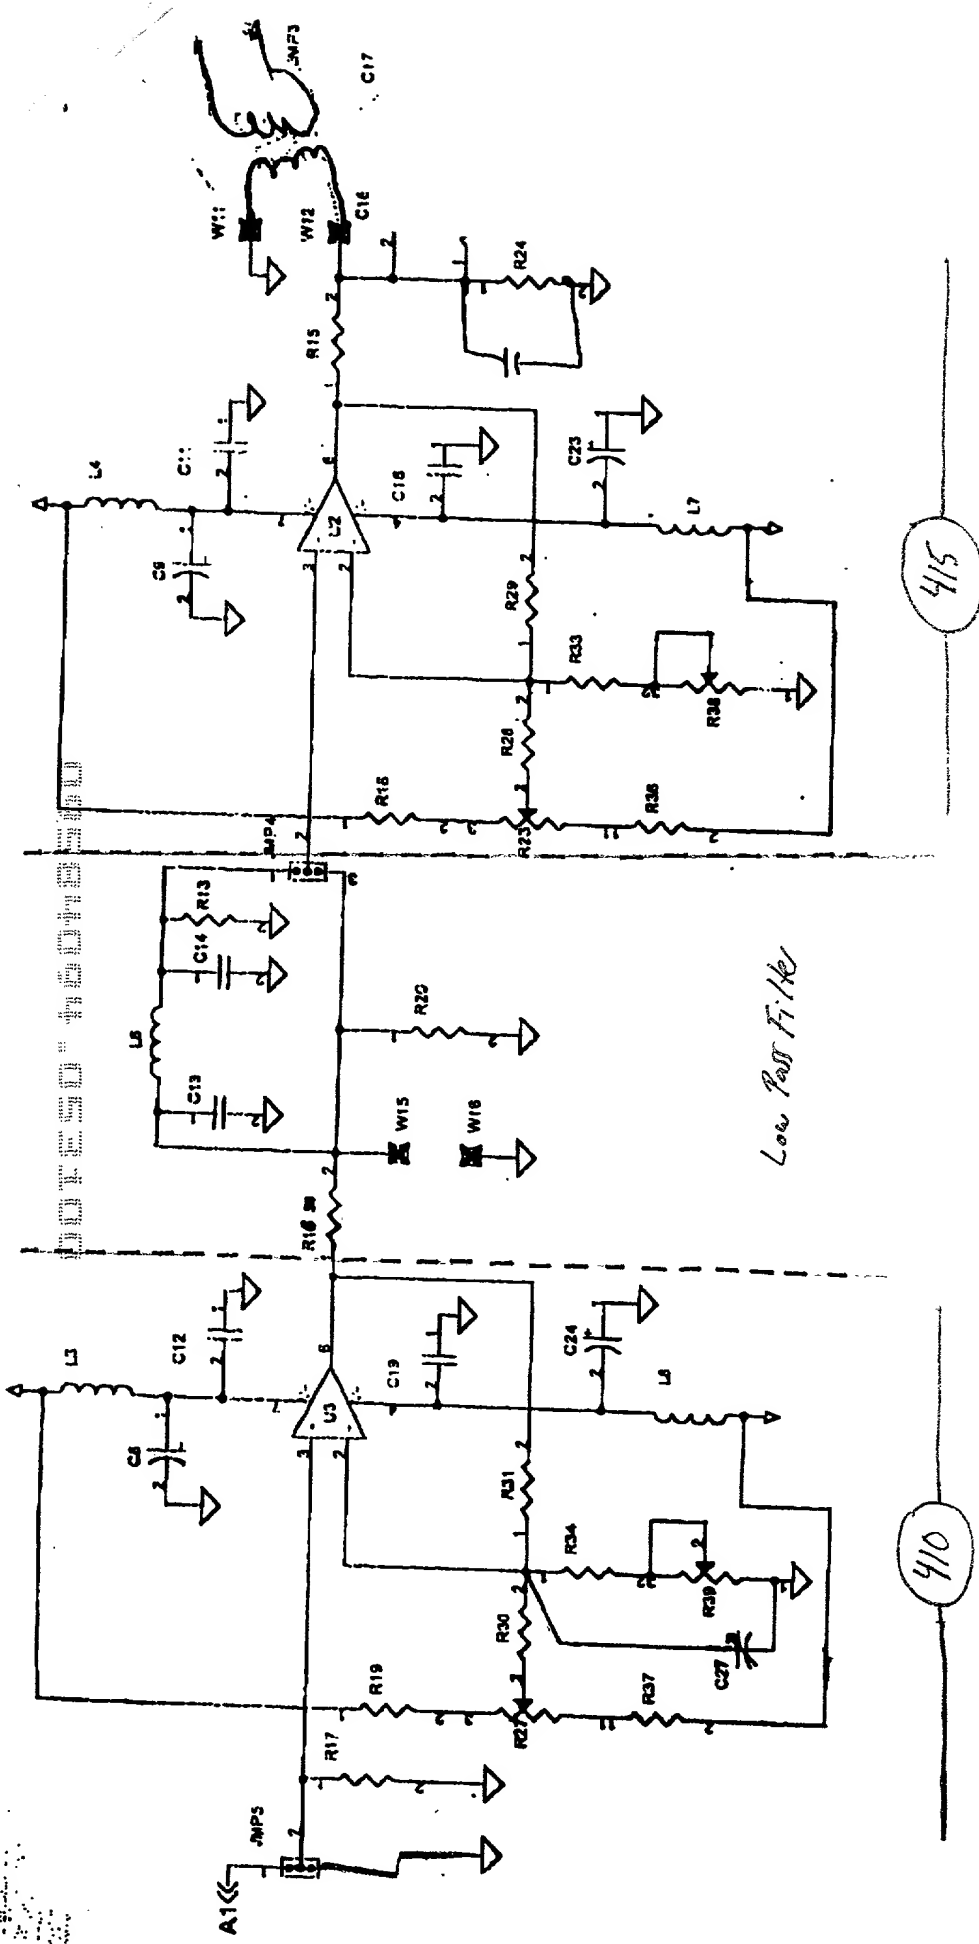


FIG. 6